







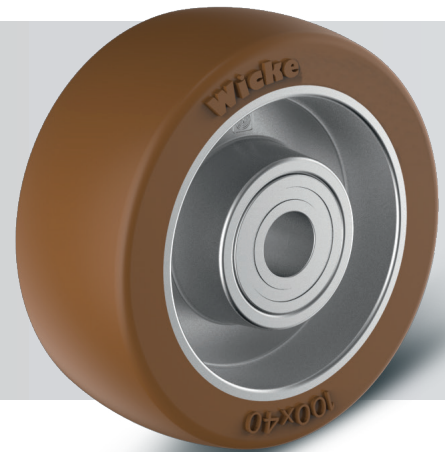

Räder für Stützlenkrollen

Wheels for stabilisation castors







减震轮

200-1150 kg



Teile-Nr. Identity-No. 产品编号	Bezeichnung Description 产品型号	Material Tyre material 轮胎材料							
			mm	mm	mm	mm	mm	mm	mm
100818	DE 100/40- 75/2K	Wicke-ELASTIC black	100	40	40	40	15	200	
100865	PE 100/40- 75/1K	Topthane® 92 Shore A	100	40	40	40	12	380	
177063	PS 100/ 40- 63,5/4K-S	Topthane® 92 Shore A	100	40	40	42	20	400	
114398	PE 100/40- 75/2K	Topthane® 92 Shore A	100	40	40	40	15	410	
168553	PG 100/ 40- 80/2K-(FA)-S	Topthane® 92 Shore A	100	40	40	40	15	420	
173825	PS 100/ 63,5- 70/5K-S	Topthane® 92 Shore A	100	63,5	63,5	63,5	25	560	
172851	VS 100/ 63,5- 70/5K-S	Vulkollan® 92 Shore A	100	63,5	63,5	63,5	25	560	
214697	PG 122/ 60- 95/5K-S	Topthane® 92 Shore A	122	60	60	53	25	750	
173557	VG 122/ 60- 95/5K-S	Vulkollan® 92 Shore A	122	60	60	60	25	750	
209947	PE 125/ 40-105/4K-S	Topthane® 92 Shore A	125	40	40	46	20	520	
239062	PE 125/ 40-105/4K-S	Topthane® 92 Shore A	125	40	45	45	15	520	
100866	PE 125/40-100/4K	Topthane® 92 Shore A	125	40	50	50	20	520	
152466	PG 125/ 40-105/4K-S	Topthane® 92 Shore A	125	40	50	48	20	530	
100821	DE 125/50- 75/4K	Wicke-ELASTIC black	125	50	60	60	20	225	
164692	PG 125/ 50- 80/4K	Topthane® 92 Shore A	125	50	50	50	20	610	
173683	VG 125/ 50- 80/4K-S	Vulkollan® 92 Shore A	125	50	60	60	20	610	
147243	GG 125/ 50- 80/6K-S	Wicke-ELASTIC black	125	50	50	54	20	225	
107000	PG 125/ 50-105/4K	Topthane® 92 Shore A	125	50	60	60	20	660	
139910	VG 125/ 50-105/4K	Vulkollan® 92 Shore A	125	50	60	60	20	660	
145175	VG 125/ 50-105/6K-S	Vulkollan® 92 Shore A	125	50	50	54	20	660	
195772	PG 125/ 54- 95/6K-(FA)S	Topthane® 92 Shore A	125	54	60	60	30	690	
175503	VG 125/ 54- 95/6K-(FA)S	Vulkollan® 92 Shore A	125	54	58	62	25	680	
122333	VG 125/ 60- 95/4K-S	Vulkollan® 92 Shore A	125	60	58	62	20	760	
182132	VG 140/ 40-105/4K-S	Vulkollan® 92 Shore A	140	40	45	45	20	560	
158839	VG 140/ 50-105/6K-S	Vulkollan® 92 Shore A	140	50	50	53,8	20	610	
199322	VG 140/ 50-105/6K-S	Vulkollan® 92 Shore A	140	50	50	53,8	20	700	
187854	VG 140/ 50-105/6K-S	Vulkollan® 92 Shore A	140	50	50	62,5	20	700	
124900	PG 140/ 54- 95/4K-S	Topthane® 92 Shore A	140	54	60	60	20	730	
158422	CG 140/ 54- 95/4K-S	DynaRoll® 95 Shore A	140	54	60	60	20	730	
182432	PG 140/ 54-105/4K-(FA)-S	Topthane® 92 Shore A	140	54	60	60	20	760	
187092	VG 140/ 54-105/4K-(FA)-S	Vulkollan® 92 Shore A	140	54	60	60	20	760	
176698	VE 140/ 54-110/4K-S	Vulkollan® 92 Shore A	140	54	60	60	20	770	
138703	VG 140/ 60-115/4K-S	Vulkollan® 92 Shore A	140	60	68	68	20	870	
174906	PG 140/ 60-115/6K-S	Topthane® 92 Shore A	140	60	68	74,4	20	870	
193544	VG 140/ 60-115/6K-S	Vulkollan® 92 Shore A	140	60	60	66	12	870	



Teile-Nr. Identity-No. 产品编号	Bezeichnung Description 产品型号	Material Tyre material 轮胎材料						
			mm	mm	mm	mm	kg	
179617	VG 150/ 48-125/4K-(FA)-S	Vulkollan® 92 Shore A	150	48	60	60	20	750
158090	PG 150/ 48-125/4K-(FA)-S	Topthane® 92 Shore A	150	48	60	60	20	800
144484	PG 150/ 48-125/4K-S	Topthane® 92 Shore A	150	48	50	50	20	750
143144	VG 150/ 48-125/4K-S	Vulkollan® 92 Shore A	150	48	56	60	20	750
147321	PG 150/ 48-125/6K-FA-S	Topthane® 92 Shore A	150	48	60	66,3	12	650
199318	VG 150/ 48-125/6K-FA-S	Vulkollan® 92 Shore A	150	48	60	66,5	12	750
100868	PE 150/50-120/4K	Topthane® 92 Shore A	150	48	60	60	20	730
185886	TE 150/ 54-110/4K-S	Redthane® 75 Shore A	150	54	60	60	20	600
145845	VG 150/ 60-115/5K-S	Vulkollan® 92 Shore A	150	60	68	68	25	900
107607	PG 150/ 60-125/4K	Topthane® 92 Shore A	150	60	60	60	20	930
196581	VG 150/ 79-100/4K-S	Vulkollan® 92 Shore A	150	79	79	71,7	20	1130
143300	PG 150/ 79-105/4K-S	Topthane® 92 Shore A	150	79	79	71,5	20	1150
100869	PE 160/50-140/4K	Topthane® 92 Shore A	160	52	60	60	20	880
199572	VG 180/ 65-145/5K	Vulkollan® 92 Shore A	180	65	75	75	25	1150
181670	VG 200/55-160/KE-(RA)-S	Vulkollan® 92 Shore A	200	55	58	37	39	940